



# HZ040, HZ050 & HZ025 INTRINSICALLY SAFE LIGHTS

## INTRINSICALLY SAFE

**I-SAFE™**


COAST's intrinsically safe (I-SAFE™) lights are designed to provide safe and reliable operation in hazardous gas environments. At the same time, I-SAFE lights offer a number of Coast's innovative beam and build technologies. The end result is a handheld and headlamp series that can be trusted tough—and trusted safe.

## HZ040

**4 × AA**  
Not Included

Part: 30044

### 3 Mode Options



ANSI FL1 (Aik)	High	Low
Lumens	165	65
Beam Distance	165m	100m
Runtime	8h 15min	37h

#### SAFETY RATINGS

Class I Div 1&2 Grp ABCD / Class II Div 1&2 Grp EFG  
Class III / Temperature Code T4 IP67  
File number: E500019



Gas: II 1G Ex ia IIC T4 Ga  
Mine: I M1 Ex ia I Ma  
DEMKO 18 ATEX 2090X



READ MANUAL  
BEFORE USE

Gas: Ex ia IIC T4 Ga  
IECEx Mine: Ex ia I Ma  
IECEx UL 18.0097X

**APPROVED BATTERIES:**  
Energizer E91  
Duracell MN1500  
\*Reference user manual  
for a complete list of  
compatible battery types





## HZ050

**3 × AA**  
Not Included

Part: 30047

### 5 Beam Options

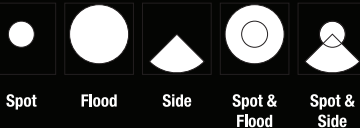

ANSI FL1	Spot	Flood	Side
Lumens	200	30	100
Beam Distance	128m	12m	17m
Runtime	13h	13h	15h

ANSI FL1	Spot & Flood	Spot & Side
Lumens	185	260
Beam Distance	118m	76m
Runtime	5h 15min	5h 15min

#### SAFETY RATINGS

CL I, II & III, DIV 1, GP A-G T3  
CL I, ZN 0, Ex&AEx ia IIC T3  
Ⓜ II 1G Ex ia op is IIC T3 Ga  
Ⓜ I M1 Ex ia op is I Ma

READ MANUAL  
BEFORE USE

**APPROVED BATTERIES:**  
Duracell MN1500

**COAST****TRUSTED TOUGH™****COASTPORTLAND.COM**